

BSD Infotech

15" Performance POS Terminal
Supporting Full HD Media Play



Katana is a high performance point of sale terminal featuring a ATI HD-3200 graphic IC to support outstanding multimedia graphics performance for hospitality environments. Katana can also serve as a digital signage player to provide a higher level of point of sale experience.



Features

Integrated ATI HD-3200 Graphic IC Multifunctional POS

Supports multiple media formats for digital signage or indoor advertisement usage



Dual HDD Supporting Raid Function Reliable storage

Provides a secure data protection as well as a faster and safer data backup




Side I/O Interface (USB, Power Button) Easy maintenance

Update driver with an easy accessible side USB and power button


Integrated OSD and Monitor Indicator Adjustable screen brightness

Adjust the screen brightness on the side of the screen accommodating different settings and preferences

I/O Interface

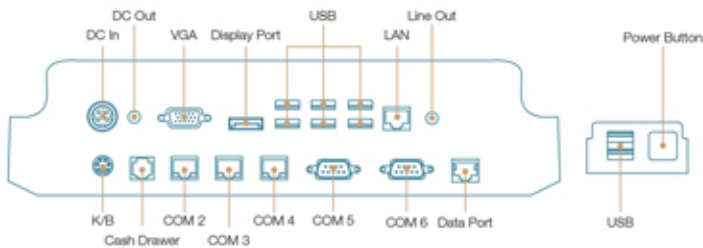

Dimensions

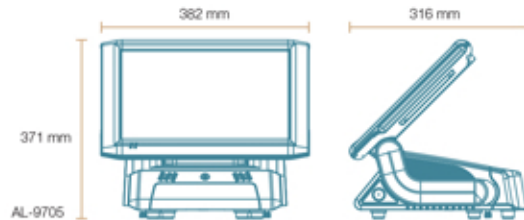

Specifications

Model	AL-9705
Processor	AMD Athlon 3100+ 2.0GHz (Single Core) / 3600+ 1.9GHz (Dual Core)
System Memory	512MB standard, maximum 4GB (2 x 240-pin DDR2 SDRAM)
Speaker	Built-in Speaker 2W x 2
Power Supply	150W (12V/12.5A) External Power Adaptor
Storage Device	2 x 2.5" SATA HDD bays available with RAID function support (one tray as default, the 2nd as optional)
Construction	Aluminum Die-casting + SECC
Housing Color	Silver+White / Black+Silver
Touch LCD Display	
Size / Resolution	15" TFT LCD / 1024 x 768
Brightness	250 / 350 cd/m ²
Touch Screen	Resistive Touch / Capacitive Touch
I/O Ports	
Serial Port	5 x External: COM2 & COM3 & COM4 (RJ45) with 5V/12V/RI selectable, COM5 & COM6 (DB9) with RI only 1 x Internal: COM1
USB Port	8 x External USB port (6 in rear, 2 in side), 2 x Internal
Data Port	1 x RJ45 (10P10C) for LPT-type KeyPro application only
Cash Drawer Port	1 x RJ11 (12V/24V selectable)
PS/2	1 x Keyboard
LAN Port	1 x RJ45 Giga LAN
Video Port	1 x VGA (DB15), 1 x Display port
Audio Port	1 x Line-out
DC Output	1 x 12V for 2nd display
OS Supported	
Windows	XP Pro, XP Embedded, WEPOS, POSReady 2009, Win 7
Linux	Fedora, SUSE
Physical Dimensions	
Dimensions (WxHxD)	382 x 371 x 316 mm
Environment	
EMI / Safety	CE, FCC Class A
Operating Temperature	0°C ~ 40°C (32°F ~ 104°F)
Storage Temperature	-10°C ~ 50°C (14°F ~ 122°F)
Relative Humidity	10% ~ 90% (non-condensing)
Optional Peripherals	
Magnetic Stripe Card Reader	MCR single/dual/triple Track
MCR 3-in-1	Integrated MCR/Smartcard/Fingerprint or RFID
i-Button	Integrated on the system base (pre-installed by factory)
2nd Display	12.1"/15" pole-type LCD display (touch screen optional)
Customer Display	Pole-type VFD customer display
Wireless LAN	Integrated 802.11b/g wireless LAN module (pre-installed by factory)