

## BSD Infotech

15" Performance POS Terminal  
Supporting Full HD Media Play



Katana is a high performance point of sale terminal featuring a ATI HD-3200 graphic IC to support outstanding multimedia graphics performance for hospitality environments. Katana can also serve as a digital signage player to provide a higher level of point of sale experience.



### Features

#### Integrated ATI HD-3200 Graphic IC Multifunctional POS

Supports multiple media formats for digital signage or indoor advertisement usage



#### Dual HDD Supporting Raid Function Reliable storage

Provides a secure data protection as well as a faster and safer data backup




#### Side I/O Interface (USB, Power Button) Easy maintenance

Update driver with an easy accessible side USB and power button


#### Integrated OSD and Monitor Indicator Adjustable screen brightness

Adjust the screen brightness on the side of the screen accommodating different settings and preferences

## I/O Interface

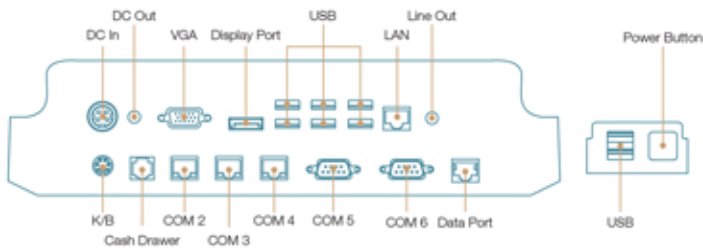

## Dimensions

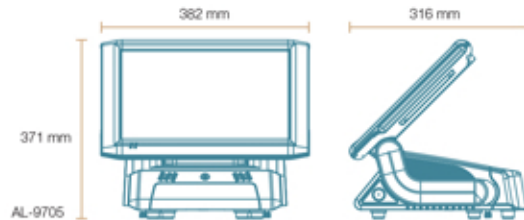

## Specifications

Model	AL-9705
Processor	AMD Athlon 3100+ 2.0GHz (Single Core) / 3600+ 1.9GHz (Dual Core)
System Memory	512MB standard, maximum 4GB (2 x 240-pin DDR2 SDRAM)
Speaker	Built-in Speaker 2W x 2
Power Supply	150W (12V/12.5A) External Power Adaptor
Storage Device	2 x 2.5" SATA HDD bays available with RAID function support (one tray as default, the 2nd as optional)
Construction	Aluminum Die-casting + SECC
Housing Color	Silver+White / Black+Silver
<b>Touch LCD Display</b>	
Size / Resolution	15" TFT LCD / 1024 x 768
Brightness	250 / 350 cd/m <sup>2</sup>
Touch Screen	Resistive Touch / Capacitive Touch
<b>I/O Ports</b>	
Serial Port	5 x External: COM2 & COM3 & COM4 (RJ45) with 5V/12V/RI selectable, COM5 & COM6 (DB9) with RI only 1 x Internal: COM1
USB Port	8 x External USB port (6 in rear, 2 in side), 2 x Internal
Data Port	1 x RJ45 (10P10C) for LPT-type KeyPro application only
Cash Drawer Port	1 x RJ11 (12V/24V selectable)
PS/2	1 x Keyboard
LAN Port	1 x RJ45 Giga LAN
Video Port	1 x VGA (DB15), 1 x Display port
Audio Port	1 x Line-out
DC Output	1 x 12V for 2nd display
<b>OS Supported</b>	
Windows	XP Pro, XP Embedded, WEPOS, POSReady 2009, Win 7
Linux	Fedora, SUSE
<b>Physical Dimensions</b>	
Dimensions (WxHxD)	382 x 371 x 316 mm
<b>Environment</b>	
EMI / Safety	CE, FCC Class A
Operating Temperature	0°C ~ 40°C (32°F ~ 104°F)
Storage Temperature	-10°C ~ 50°C (14°F ~ 122°F)
Relative Humidity	10% ~ 90% (non-condensing)
<b>Optional Peripherals</b>	
Magnetic Stripe Card Reader	MCR single/dual/triple Track
MCR 3-in-1	Integrated MCR/Smartcard/Fingerprint or RFID
i-Button	Integrated on the system base (pre-installed by factory)
2nd Display	12.1"/15" pole-type LCD display (touch screen optional)
Customer Display	Pole-type VFD customer display
Wireless LAN	Integrated 802.11b/g wireless LAN module (pre-installed by factory)