

RP-7000 Pro

15" or 17" Multifunctional Fan-less
Wall-Mount Terminal



FEC wall-mount terminal are specifically designed to create a seamless look. With a selection of optional integrated peripherals such as barcode scanner and speakers, the terminal can be enhanced to perform as a price checker or broadcasting system. Optional wireless LAN allows administrator access for instant content changes and updates.



Features

Fan-less Design

Ventless housing with slim frame

Quiet and slim fan-less design allows terminal to be implemented in a variety of environments



15" or 17" Screen with Optional Barcode Scanner and Speakers

Supports various multimedia outlets

Effective price checker, interactive product information and advertising broadcaster to enhance the customer experience



Wireless LAN

Remote management


Manage and update the system via network reducing system down time as well as efficiently managing small and large scale deployments

Downward Facing I/O Connector Panel


Space saving

Wires are connected downward reducing space needed between the terminal and wall

I/O Interface

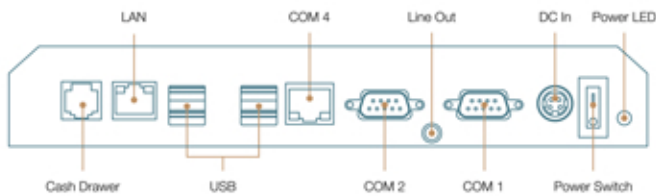

Dimensions

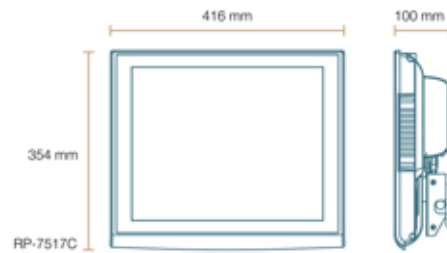

Specifications

Model	RP-7515C / RP-7515PC	RP-7517C / RP-7517PC
Processor	Intel® Atom™ N270 1.6 GHz	
System Memory	1 GB Standard, Maximum 4 GB (2 x 200-pin DDR2)	
Power Supply	150W (12V / 12.5A) External Power Adaptor	
Storage Device	1 x 2.5" SATA HDD	
Speaker	Built-in Speaker 2W x 2 (Must Come with Scanner Module)	
Construction	Aluminum Die-casting, Plexi-Glass Acrylic (Front Bezel)	
Compliance	IP54 for Front Bezel	
Housing Color	Black / Silver	
Touch LCD Display		
Size / Resolution	15" TFT LCD / 1024 x 768	17" TFT LCD / 1280 x 1024
Brightness	250 / 350 cd/m ²	380 cd/m ²
Touch Screen	5-Wire Resistive Touch / IR Touch	5-Wire Resistive Touch
I/O Ports		
Serial Port	3 x External : COM1 & COM2 (DB9); COM4 (RJ45 with LED)	
USB Port	4 x External	
Cash Drawer Port	1 x 12V RJ11	
LAN Port	1 x RJ45 Giga LAN	
Audio Port	1 x Line-out	
OS Supported		
Windows	Windows XP, Windows XPE, POSReady 2009, Windows 7	
Linux	Per Request	
Physical Dimensions		
Dimensions (WxHxD)	374 x 316 x 92 mm	416 x 354 x 100 mm
Environment		
EMI / Safety	CE, FCC Class A	
Operating Temperature	0°C ~ 35°C (32°F ~ 95°F)	
Storage Temperature	-10°C ~ 40°C (14°F ~ 104°F)	
Relative Humidity	10% ~ 90% (Non-condensing)	
Optional Peripherals		
Magnetic Stripe Card Reader	MCR Single / Dual / Triple Track	
2-in-1 / 3-in-1 Module	MCR + i-Button / MCR + RFID / MCR + Fingerprint / MCR + Smartcard + i-Button	
Scanner Module	Laser Scanner: Metrologic IS3480 with speaker 2W x 2	
Wireless LAN	802.11 b/g/n Wireless LAN Module	