

RP-7000 Pro

15" or 17" Multifunctional Fan-less
Wall-Mount Terminal



FEC wall-mount terminal are specifically designed to create a seamless look. With a selection of optional integrated peripherals such as barcode scanner and speakers, the terminal can be enhanced to perform as a price checker or broadcasting system. Optional wireless LAN allows administrator access for instant content changes and updates.



Features

Fan-less Design

Ventless housing with slim frame

Quiet and slim fan-less design allows terminal to be implemented in a variety of environments



15" or 17" Screen with Optional Barcode Scanner and Speakers

Supports various multimedia outlets

Effective price checker, interactive product information and advertising broadcaster to enhance the customer experience



Wireless LAN

Remote management


Manage and update the system via network reducing system down time as well as efficiently managing small and large scale deployments

Downward Facing I/O Connector Panel


Space saving

Wires are connected downward reducing space needed between the terminal and wall

I/O Interface

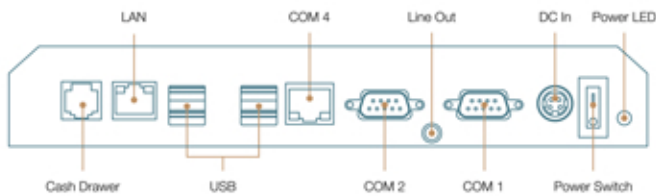

Dimensions

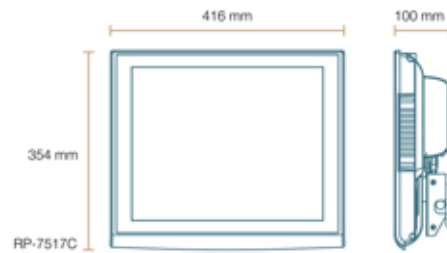

Specifications

| Model | RP-7515C / RP-7515PC | RP-7517C / RP-7517PC |
|-----------------------------|--|---------------------------|
| Processor | Intel® Atom™ N270 1.6 GHz | |
| System Memory | 1 GB Standard, Maximum 4 GB (2 x 200-pin DDR2) | |
| Power Supply | 150W (12V / 12.5A) External Power Adaptor | |
| Storage Device | 1 x 2.5" SATA HDD | |
| Speaker | Built-in Speaker 2W x 2 (Must Come with Scanner Module) | |
| Construction | Aluminum Die-casting, Plexi-Glass Acrylic (Front Bezel) | |
| Compliance | IP54 for Front Bezel | |
| Housing Color | Black / Silver | |
| Touch LCD Display | | |
| Size / Resolution | 15" TFT LCD / 1024 x 768 | 17" TFT LCD / 1280 x 1024 |
| Brightness | 250 / 350 cd/m ² | 380 cd/m ² |
| Touch Screen | 5-Wire Resistive Touch / IR Touch | 5-Wire Resistive Touch |
| I/O Ports | | |
| Serial Port | 3 x External : COM1 & COM2 (DB9); COM4 (RJ45 with LED) | |
| USB Port | 4 x External | |
| Cash Drawer Port | 1 x 12V RJ11 | |
| LAN Port | 1 x RJ45 Giga LAN | |
| Audio Port | 1 x Line-out | |
| OS Supported | | |
| Windows | Windows XP, Windows XPFE, POSReady 2009, Windows 7 | |
| Linux | Per Request | |
| Physical Dimensions | | |
| Dimensions (WxHxD) | 374 x 316 x 92 mm | 416 x 354 x 100 mm |
| Environment | | |
| EMI / Safety | CE, FCC Class A | |
| Operating Temperature | 0°C ~ 35°C (32°F ~ 95°F) | |
| Storage Temperature | -10°C ~ 40°C (14°F ~ 104°F) | |
| Relative Humidity | 10% ~ 90% (Non-condensing) | |
| Optional Peripherals | | |
| Magnetic Stripe Card Reader | MCR Single / Dual / Triple Track | |
| 2-in-1 / 3-in-1 Module | MCR + i-Button / MCR + RFID / MCR + Fingerprint / MCR + Smartcard + i-Button | |
| Scanner Module | Laser Scanner: Metrologic IS3480 with speaker 2W x 2 | |
| Wireless LAN | 802.11 b/g/n Wireless LAN Module | |